



# Classic V

**Light Duty, Wrapped V-belt**  
Relative Power  $\uparrow$ 75

Ideal for high ratio or small pulley drives, the Fenner® Classic V belt has a specially treated jacket to give superior anti-static, heat and oil resistant properties which exceeds the new industry anti-ignition standards. It conforms to DIN 2215 (German Institute for Standardization) and RMA IP20.


### Benefits

- > Accuracy and stability of length
- > One-shot tensioning for fit-and-forget reliability
- > Extended temperature range -40°C to +70°C
- > PB® (Precision Build) technology, eliminating the need for matching
- > Fully approved by all international standards
- > BS 3790 (British Standard)
- > ISO 4184 (International Standards Organisation)
- > DIN 7753 (German Institute for Standardization)
- > Static conductive in accordance with ISO 1813
- > Conforms to American Petroleum Institute specifications



### Sections and Size Range

Profile	Z	A	B	C	D
Imperial Length Range (inch)		A20 - A154	B26 - B238	C49 - C444	D105 - D538
Metric Length Range (mm)	370 - 1750	540 - 3950	700 - 6070	1300 - 11330	2740 - 13700

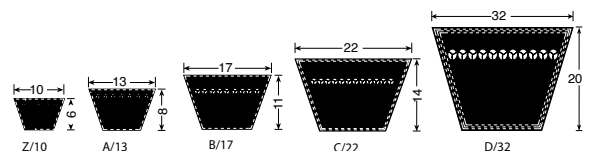

Reliable | Trusted | Connected



FPT Far East Pte. Ltd

29 Changi South Avenue 2 #04-00, ABV Building, Singapore 486444  
(65) 6545 6630 (65) 6545 7730 / 7720 sales@fpt.com.sg www.fpt.com.sg

